

Product Features:


- Dimensions according to DIN 2430- 1 and DIN 11850 other dimensions on request
- Finished welded longitudinal seam pipeline, seam special smoothed
- Inner roughness $R_a < 0.8 \mu\text{m}$
- Outer surface pickled, also electro polished or ground on request
- Inner surface pickled, also electro polished or ground on request
- Delivery lengths 6m and 12m

Material:

- Stainless steel 1.4307- ISO 304 L - 1.4541
- Stainless steel 1.4404- ISO 316 L - 1.4571

Applications:

Piggable pipeline in chemical process technology, cosmetic industry, food industry, beverage industry, petfood industry, chocolat industry and Pharmaceuticals.

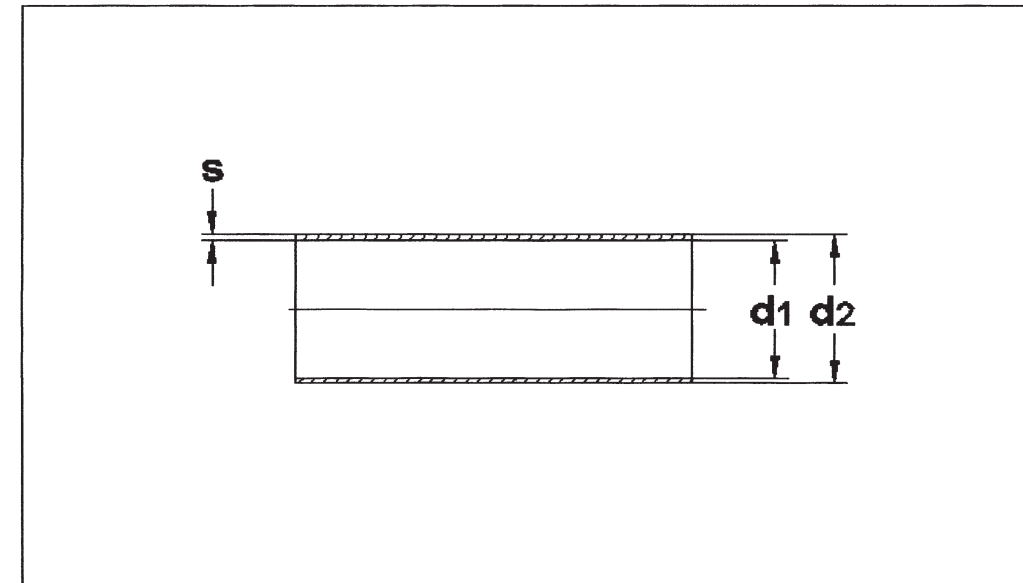

DIN 2430-1

DN	d1	d2	s	kg/m	Material	Article No.
25	29,7	33,7	2,0	1,58	1.4307/ 304 L	29256
					1.4404/ 316 L	29257
32	38,4	42,4	2,0	2,02	1.4307/ 304 L	22585
					1.4404/ 316 L	28976
50	54,5	60,3	2,9	4,17	1.4307/ 304 L	8758
					1.4404/ 316 L	8766
65	70,3	76,1	2,9	5,32	1.4307/ 304 L	8759
					1.4404/ 316 L	8767
80	82,5	88,9	3,2	6,86	1.4307/ 304 L	25278
					1.4404/ 316 L	8768
100	107,1	114,3	3,6	9,98	1.4307/ 304 L	8761
					1.4404/ 316 L	8769
125	133,7	139,7	3,0	10,27	1.4307/ 304 L	29258
					1.4404/ 316 L	29259
150	159,3	168,3	4,5	18,46	1.4307/ 304 L	29260
					1.4404/ 316 L	29261

DIN 11850

DN	d1	d2	s	kg/m	Material	Article No.
50	50	54	2,0	2,60	1.4307/ 304 L	8744
					1.4404/ 316 L	8751
65	66	70	2,0	3,40	1.4307/ 304 L	8745
					1.4404/ 316 L	8752
80	81	85	2,0	4,16	1.4307/ 304 L	8746
					1.4404/ 316 L	8753
100	100	104	2,0	5,11	1.4307/ 304 L	8747
					1.4404/ 316 L	8754
125	125	129	2,0	6,36	1.4307/ 304 L	8748
					1.4404/ 316 L	8755
150	150	154	2,0	7,61	1.4307/ 304 L	7316
					1.4404/ 316 L	29263